


BLIZZARD ON/OFF SWITCH LEADS & GROUND LEAD

FOR BLIZZARD RELAY HARNESS WHEN USING A CONTROLLER WITH A SINGLE POWER SWITCH

Note: Wire colors may be Black, Green/Yellow or Green (Instructions show Green/Yellow)


Installation Instructions

OLDER STYLE (BEFORE 2004)

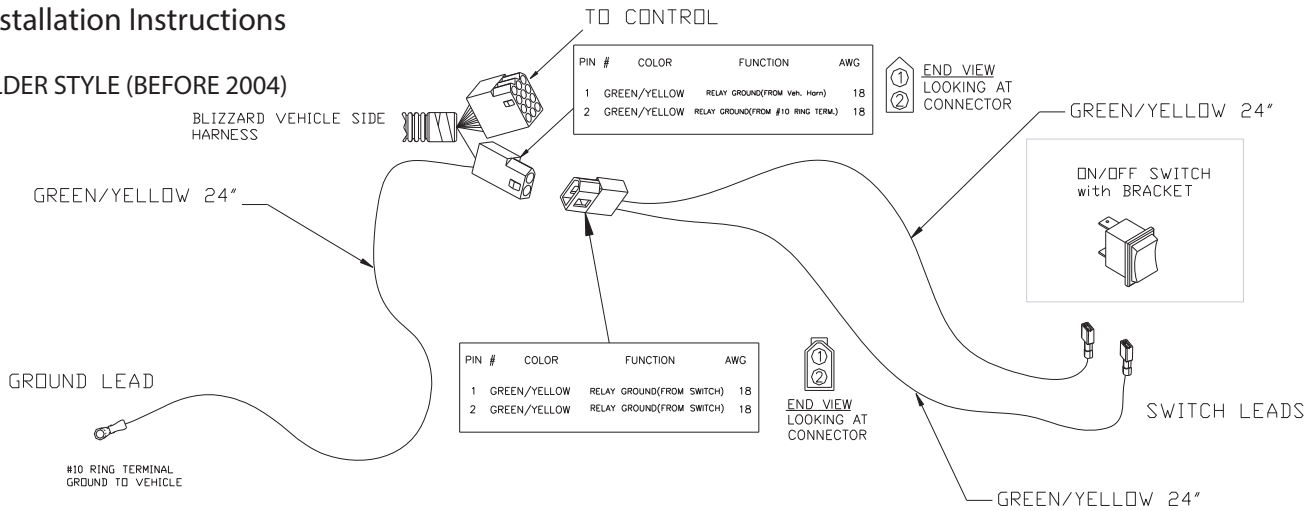

- 1.) Locate the existing Blizzard vehicle side harness connectors (12 Pin & 2 Pin), normally located under the dashboard. If only 1 cavity (Pin 1) of the 2 Pin connector is filled, you have an older style Blizzard harness and you must install the Ground Lead supplied.
 - 2.) Install the Ground Lead, as shown above, plugging the Green/Yellow Lead into Pin 2 of the Blizzard vehicle side harness 2 Pin connector. Then securely attach the ring terminal of the Ground Lead to any Ground (-) on the vehicle.
 - 3.) Mount the ON/OFF switch in a desired location on or under the dashboard. Then plug the 2 "faston" terminals of the Switch Leads to the 2 posts of the ON/OFF switch. Either Green/Yellow wire can be plugged to either switch post.
 - 4.) Plug the 2 Pin connector of the Switch Leads to the mating 2 Pin connector of the Blizzard vehicle side harness. Plug the controller onto the 12 Pin connector of the Blizzard vehicle side harness. Make sure all connections are secure.
- * The ON/OFF switch you just installed will now toggle between your plow lights and your vehicle lights. For operating the plow see your controllers operating instructions.

NEWER STYLE (2004 & AFTER)

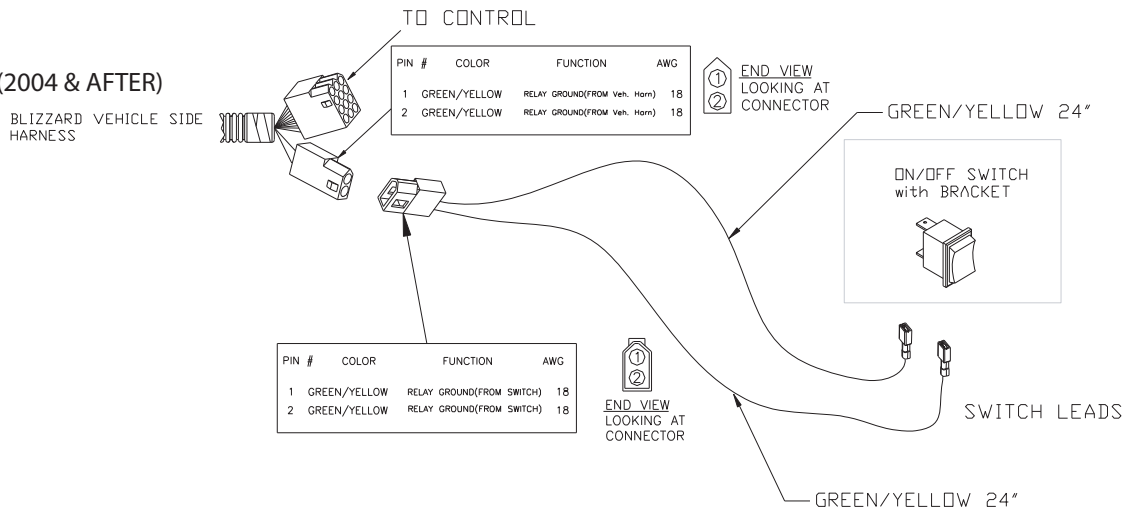

- 1.) Locate the existing Blizzard vehicle side harness connectors (12 Pin & 2 Pin), normally located under the dashboard. If both cavities (Pin 1 & Pin 2) are filled, you have a newer style Blizzard harness and you do not have to install the Ground Lead supplied. Disregard the Ground Lead.
 - 2.) Mount the ON/OFF switch in a desired location on or under the dashboard. Then plug the 2 "faston" terminals of the Switch Leads to the 2 posts of the ON/OFF switch. Either Green/Yellow wire can be plugged to either switch post.
 - 3.) Plug the 2 Pin connector of the Switch Leads to the mating 2 Pin connector of the Blizzard vehicle side harness. Plug the controller onto the 12 Pin connector of the Blizzard vehicle side harness. Make sure all connections are secure.
- * The ON/OFF switch you just installed will now toggle between your plow lights and your vehicle lights. For operating the plow see your controllers operating instructions.